

SWK-X2

www.sensetechlight.com

NO.6 ShengXing Street
WuShaCommunity,ChangAnTown,
DongguanCity,GuangdongProvince,P.R.China

VERSON:A3—20260413

Product Description

- 70W | 100W | 150W | 200W
- The light efficiency can reach: 130-170Lm/W±10%
- Angle: 60 °/90 °/120 ° Triangular angle exchange;
- Series design, lifting rings, suspension rods, brackets; Optional lampshade;
- AL1070 aluminum alloy lamp housing, streamlined design, good air convection and heat dissipation;
- IP20 protection;
- Warranty: 2 years;

Application location:

Supermarkets, warehouses, factories, sports venues,

large buildings and other places.

CE RoHS


LED High Bay Light

SWK-X20


Product parameters

Product model	SWK-X20-70W	SWK-X20-100W	SWK-X20-150W	SWK-X20-200W
Input power(w)	70W±10%	100W±10%	150W±10%	200W±10%
Input voltage(V)	220V-240Vac			
Input frequency	50/60Hz			
Input current (A)	0.33A@230Vac	0.46A@230Vac	0.70A@230Vac	0.92A@230Vac
PF	≥0.95			
Power brand	Domestic			
Driver type	Non-isolated（Domestic）			
Surge protection	L-N 4KV ,L/N-PE 6KV			
Start time	≤0.5S（&230V）			
protection grade	Class Ⅰ			
Flicker coefficient	No strobe			
Flicker coefficient	≤8%(standard)			
THD	<15%			
Light source brand	Domestic；Lumileds(customized)			
LED Type	SMD2835			
Beam Angle	60°/90°/120°			
CCT	4000K/5000K/5700K/6500K			
CRI /R9	Ra>70；Ra>80；Ra>90（customized）；/R9>0；			
SDCM	≤7			
operation temperature	-30° —— +40°			
luminaire efficiency（Lm/W）	130Lm/W±10%@，150Lm/W±10%，170Lm/W±10%，			
Dimming	none			
Housing material	AL 1070			
Shell color	Spray powder gray RAL7040			
Surface treatment of shell	Powder coating			
IK/IP	IP20			
AC input cable	PVC 3*0.75² （150mm ±50mm）			
warranty	2years			
Aluminum lampshade	Self contained			
Product size (mm)	Ø300*154	Ø300*154	Ø377*172	Ø377*172
Net weight (kg)	0.71	0.71	0.96	0.96
Gross weight (kg)	1.3	1.3	1.7	1.7
Packing size/quantity (mm)	335*335*125 1/PCS	335*335*125 1/支	410*410*145 1/支	410*410*145 1/支

Product size(mm/inch)

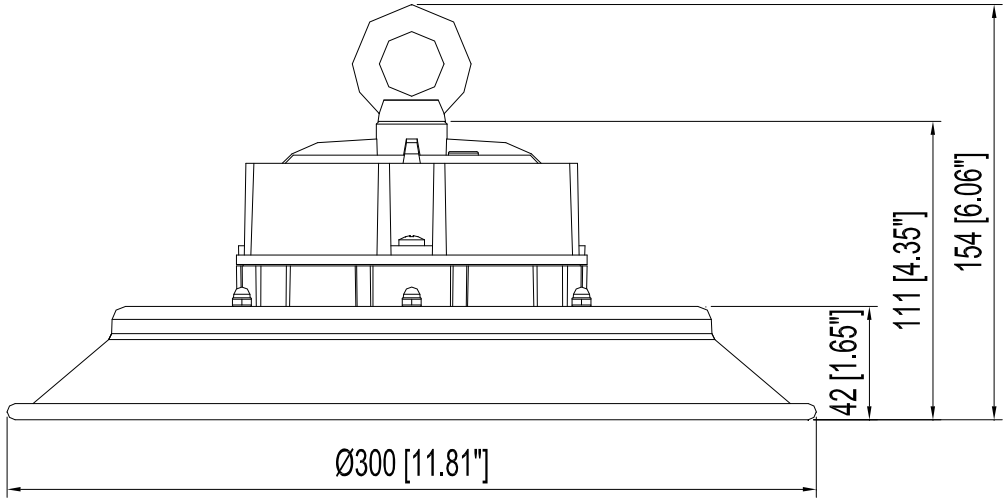

70W/100W

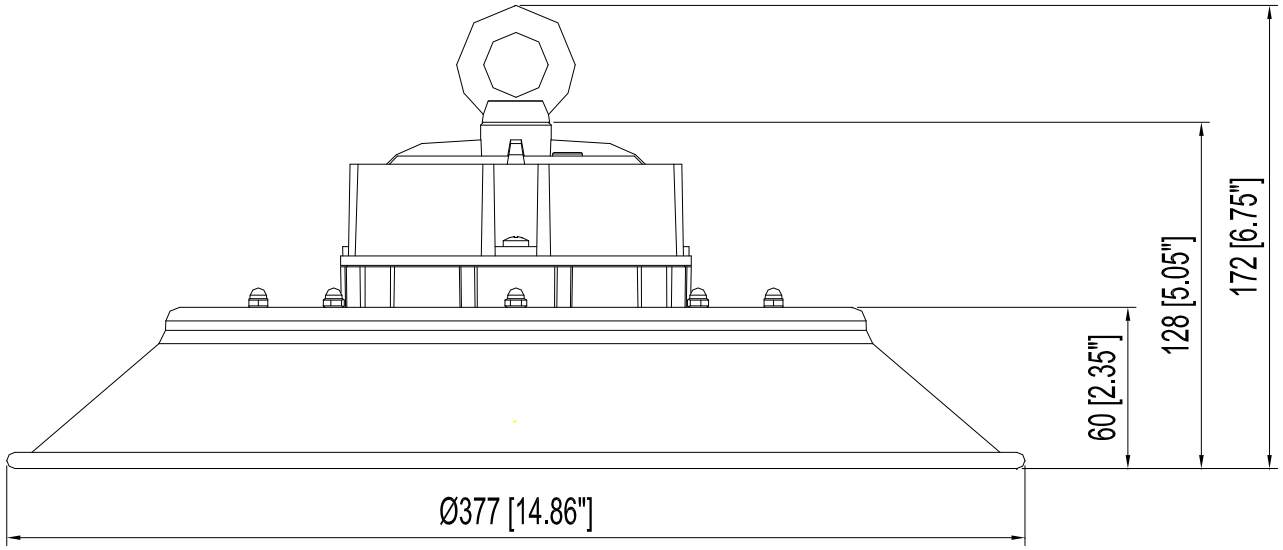

150W/200W

Schematic diagram of light distribution curve

60°

90°

120°