

User Instruction
-Urban LED Area Light

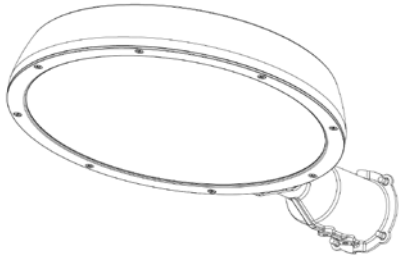


- Read through this manual before installation.
- This product must be connected to Ground
- This product must be installed and maintained by a qualified electrician.
- Consult with the manufacturer before maintenance.
- Turn OFF the power before installation and maintenance.
- Make sure this product is installed firmly.
- The body may become hot after lighting on for a long time. Do NOT touch the body.
- Make sure the lamp holder is strong enough to hold this product
- If the temperature is too high, the power will decrease until the temperature returns to normal status
- The external flexible cable or soft wire of the product can NOT be replaced. If the wire is damage, the product need to be scraped.


Turn off the switch before connecting the wires, connect to the electricity according to the following diagram.



Turn off the switch



Input wires




Dimming wires




(1) Wall Installation Method： (Unit: mm)


1.Drill holes according to the size shown in the picture, then insert 4pcs M6 expansion bolts,And the tooth pattern is exposed by about 15mm;

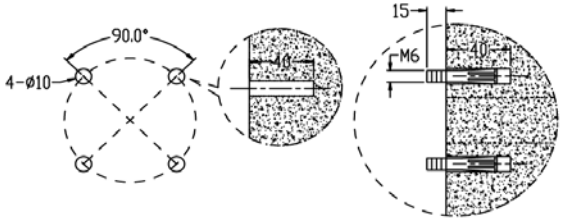


2.Wiring according to the diagram, put the lamp body on the exposed tooth pattern;

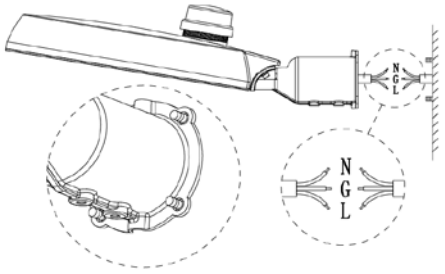

3.Tighten the 4 nuts with a wrench, and the installation is complete;;

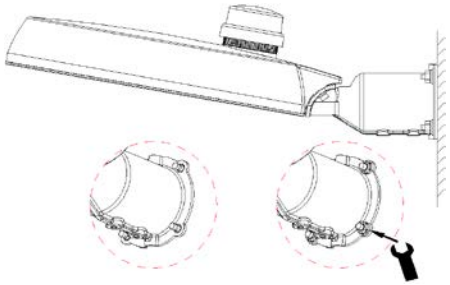


4. Loosen the screw, adjust it to the desired angle, and then tighten the screw;

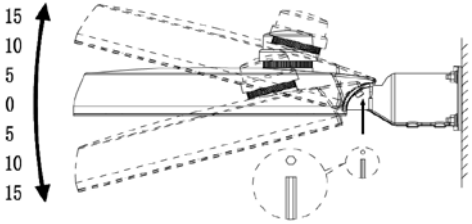


(2) Wall Installation Method： (Unit: mm)


1.Drill holes according to the size shown in the picture, then insert 4pcs M6 expansion bolts, and the tooth pattern is exposed by about 15mm;

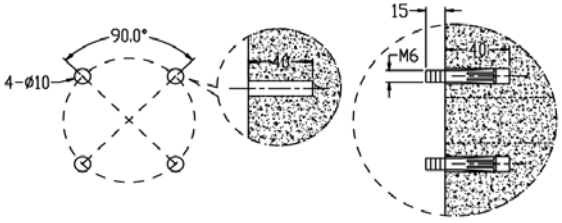

2.Lead the wire out of the groove of the base (up and down depending on the installation situation), put the lamp body on the exposed tooth pattern, and use a wrench to lock the 4 nuts;

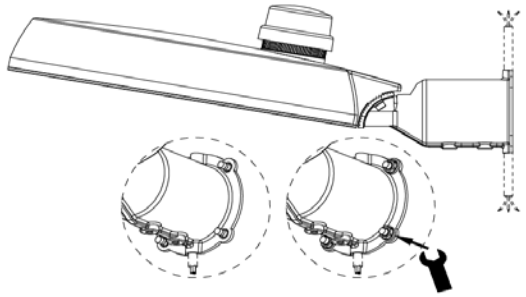


3.Wiring according to the diagram, the installation is complete;

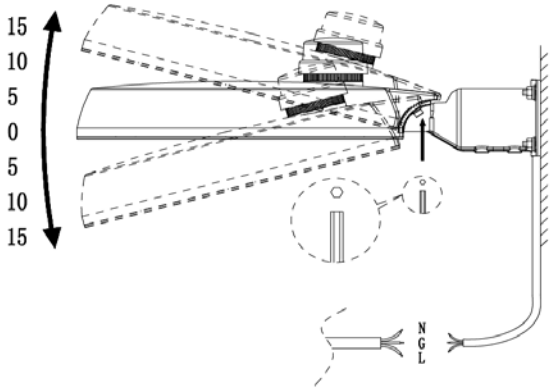

User Instruction
-Urban Aera Light


(3) Crossbar Installation Method (Type A or B） (Unit: mm)

1-A. Wiring according to the diagram, put the lamp body on the lamp pole(Ø60mm);

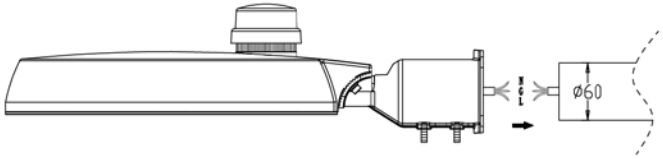


1-B-1. Install the adapter into the lamp body first;


1-B-2.Wiring according to the diagram, put the lamp body on the lamp pole(Ø40-50mm);

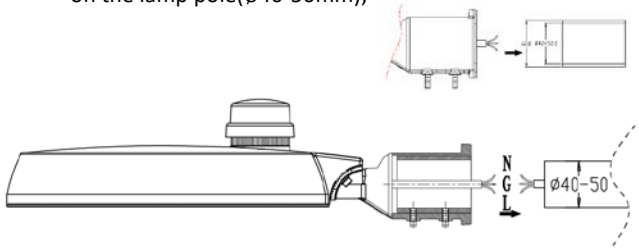

2.Tighten the 2 screws with a screwdriver;

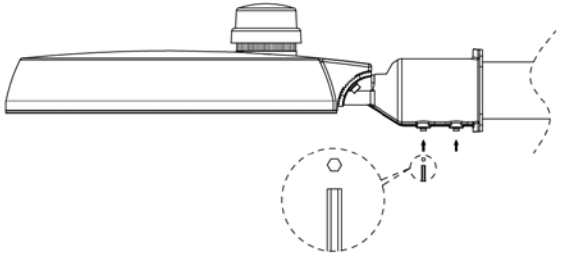


3.Adjust the luminaire to the desired angle;

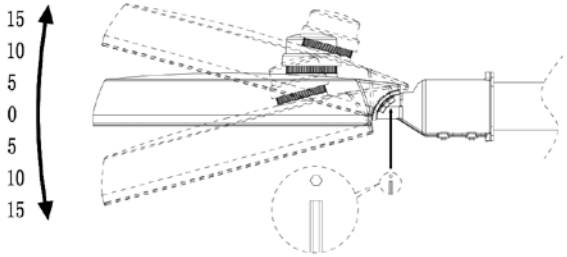


(4) Vertical pole installation method (Type A or B） (Unit: mm)

1-A. Wiring according to the diagram, put the lamp body on the lamp pole((Ø60mm);

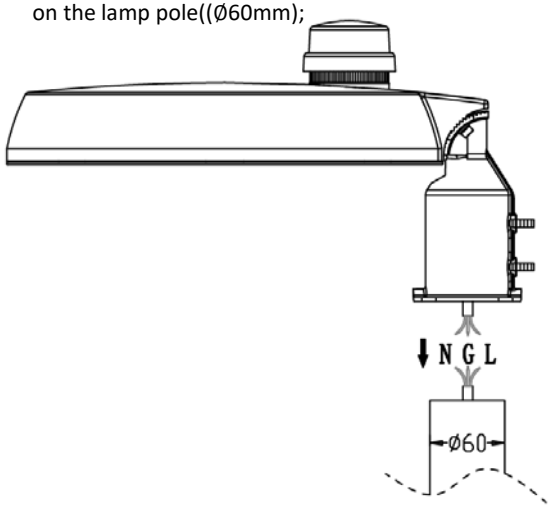


1-B-1. Install the adapter into the lamp body first;


1-B-2.Wiring according to the diagram, put the lamp body on the lamp pole(Ø40-50mm);

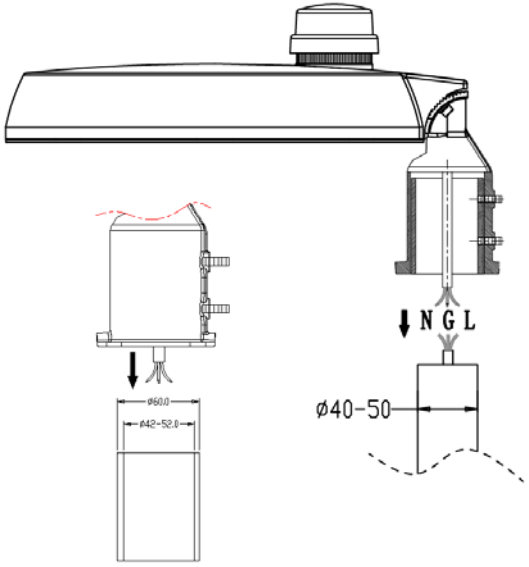

2.Tighten the 2 screws with a screwdriver;

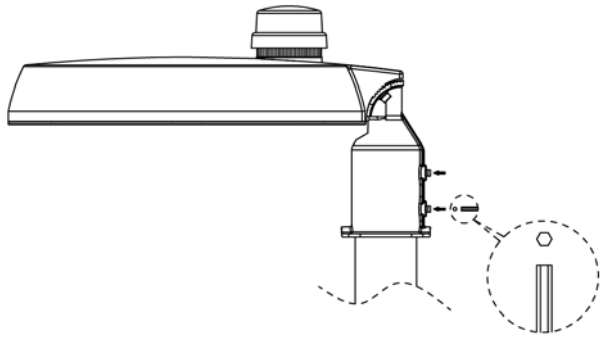

3.Adjust the luminaire to the desired angle;

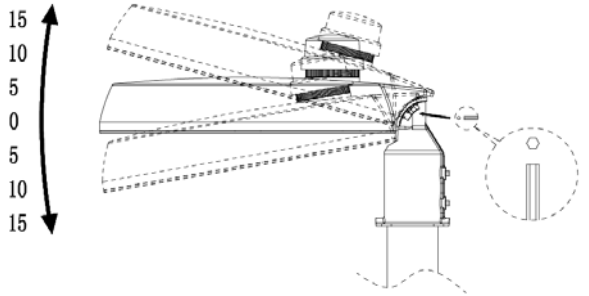

1. Unscrew the cross-shaped cover with a screwdriver;
2. Flip the switch to adjust to the desired color temperature and power; then tighten the cross-shaped cover.

